


State machine for QNI QoS NSLP node

Notations: See QoS_NSLP_state_machine_info.docOpen issue: Tear down installed QoS states
 Further considerations: Session binding

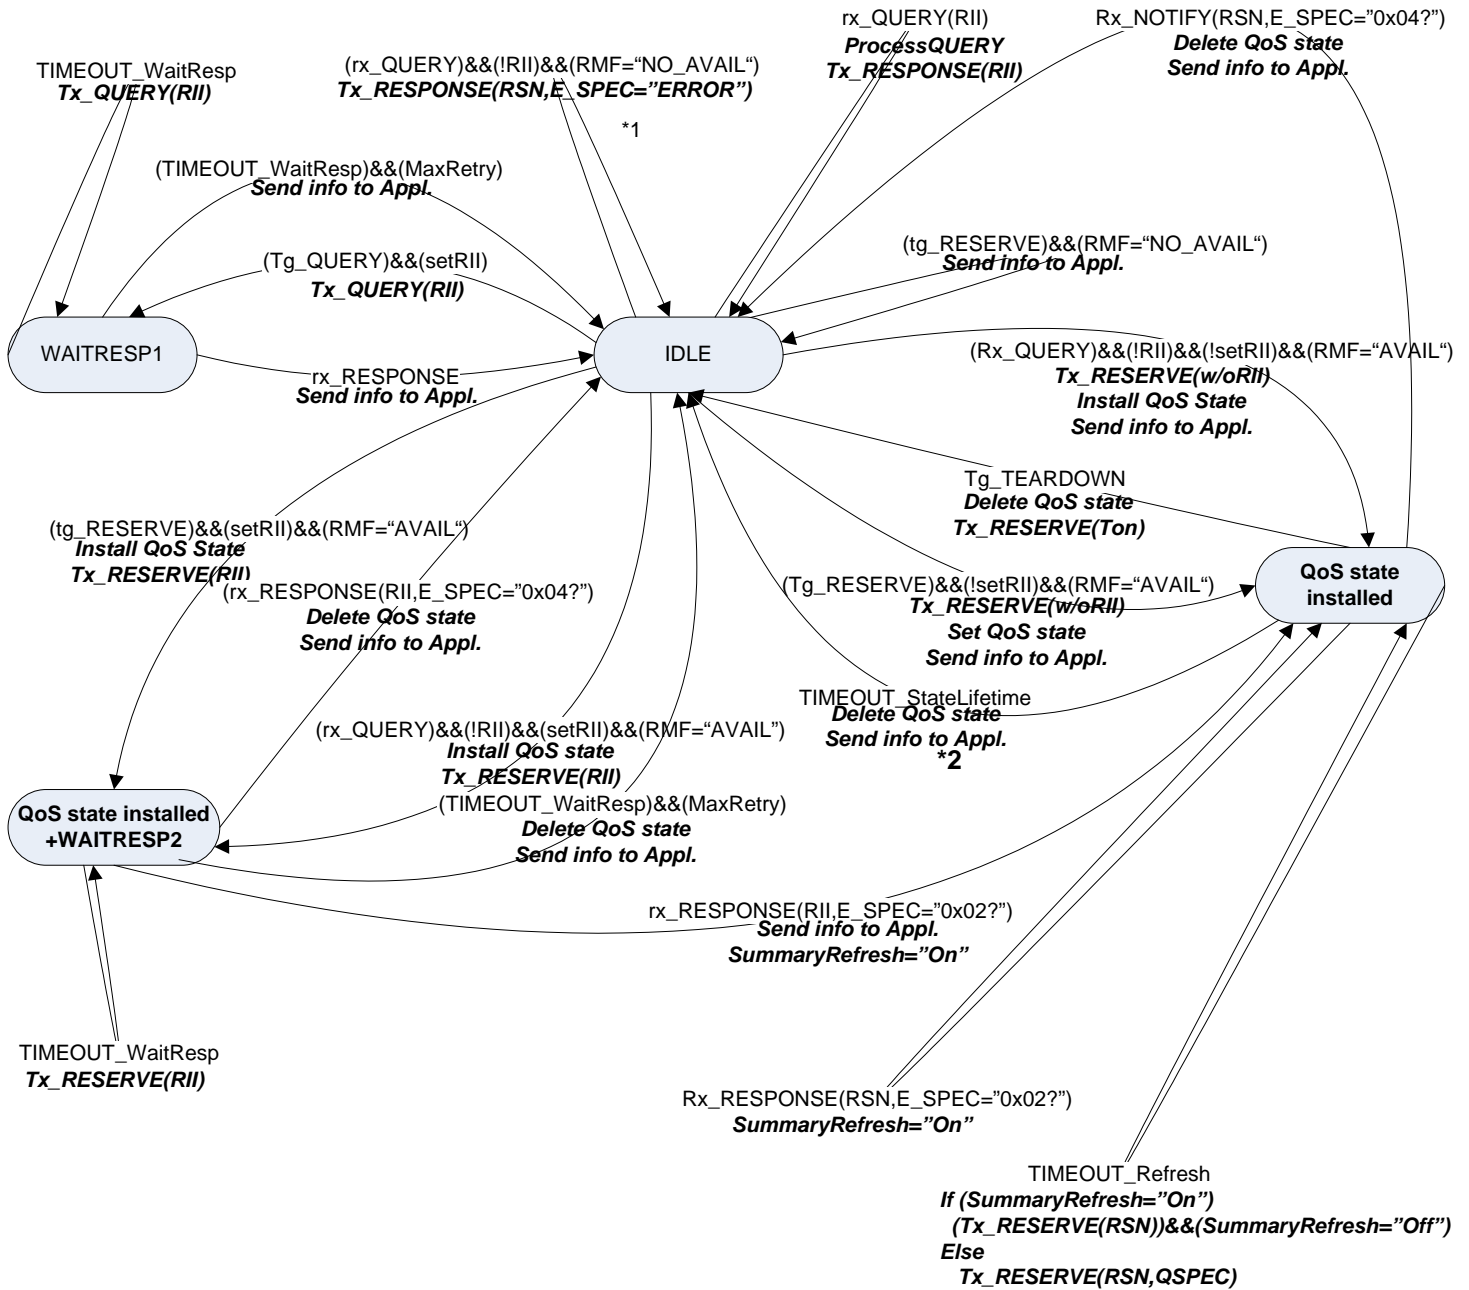

*1. How to signal unsuccessful reservation for Receiver initiated reservation(No RII is included, received Response(RSN) should not be forwarded. No E_SPEC value specified for this case.


*2. If QoS state lifetime expires in QNI, should RESERVE(Ton) be sent downstream the path.

State machine for QNI QoS NSLP node

"IDLE" state

Notations: See QoS_NSLP_state_machine_info.doc
 Open issue: Tear down installed QoS states

Further considerations: Session binding

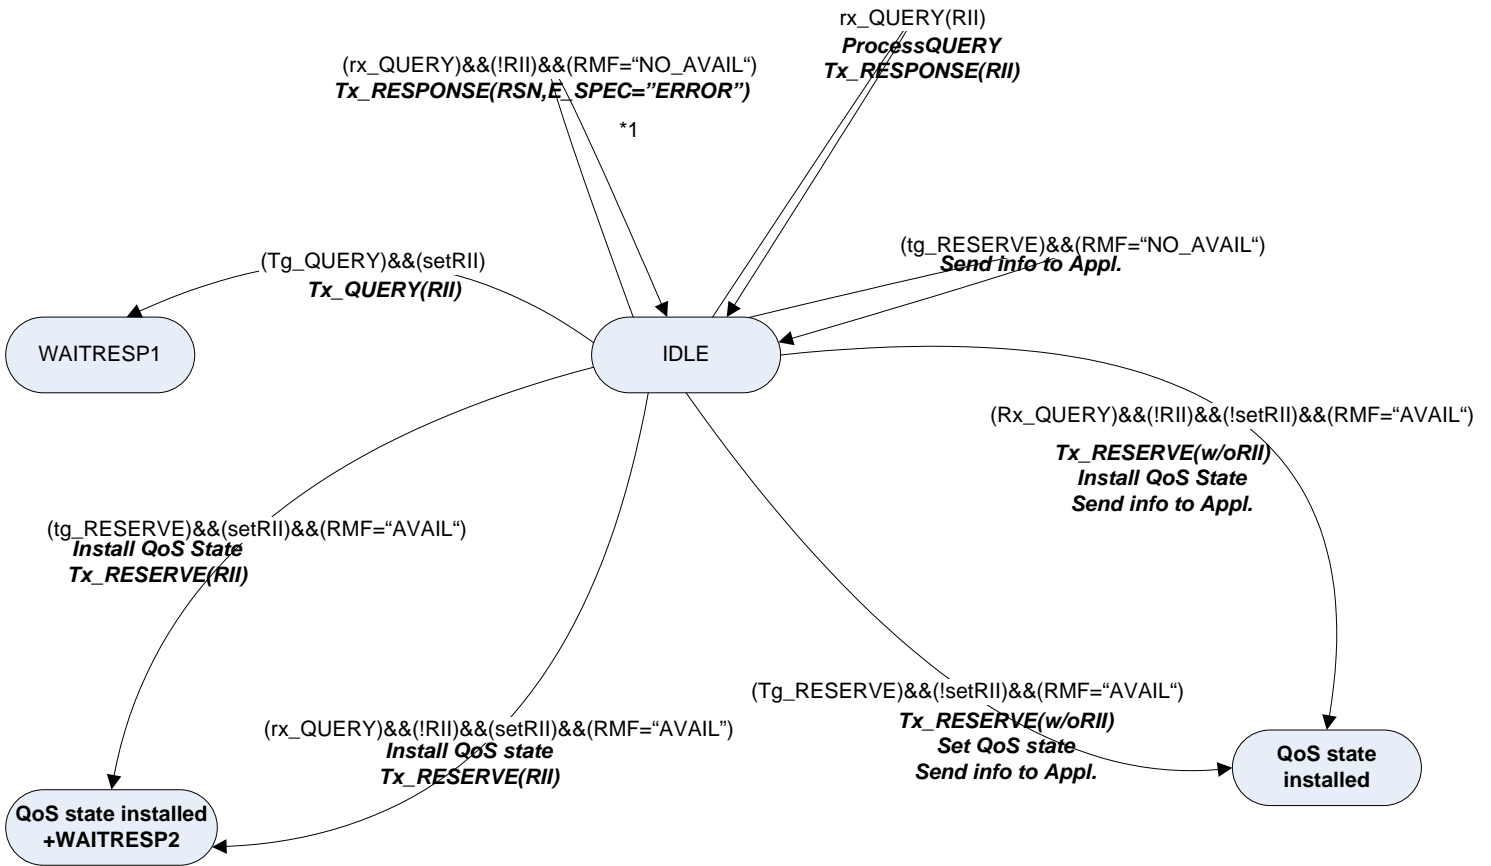

*1. How to signal unsuccessful reservation for Receiver initiated reservation(No RII is included, received Response(RSN) should not be forwarded. No E_SPEC value specified for this case.

